

HG808-D
On-line Display
Dew Point Transmitter
Product List



HENGKO Technology Co., LTD

Catalog

1 Product Introduction 2

 1.1 Product Overview 2

 1.2 Function Features 4

2 Technical Parameter 5

 2.1 Specifications 5

 2.2. Measurement values 6

3 Product Selection 8

4 Probe 9

 4.1 Probe Type 9

 4.2 Probe Type 9

5 Model List 10

6 Accessory Selection 12

Contact Us 14

1 Product Introduction

1.1 Product Overview

HG808-D series on-line display dew point transmitter is a reliable and durable dew point meter designed for measuring low dew point data in extremely low humidity conditions. It is a commonly used dew point measuring instrument for air compression, refrigeration, membrane, and adsorption dryers.

HG808-D series on-line display dew point transmitter can be installed on the front devices of industrial applications, such as pipeline drying using vacuum and dry gas purification technology, thermal regeneration compressed gas and adsorption drying, and reliable online measurement of the actual moisture of any gas in all application scenarios, including flammable or non flammable, inert or corrosive gases, to detect the residual humidity/dew point behind the plastic industry material dryer.

HG808-D series on-line display dew point transmitter include data control and measurement of low dew point under extremely strict humidity requirements in lithium battery production, electronic component production, semiconductor manufacturing, power engineering equipment, and other working conditions.

In addition, the HG808-D series on-line display dew point transmitter is commonly used for humidity detection in air separation nitrogen production, air, dry gas, compressed gas, natural gas, liquefied gas, high-temperature sintering furnace protective gas, protective gas in the electronics industry, insulation gas, refrigerants, as well as rapid analysis of trace moisture in the food industry, pharmaceutical industry, machinery manufacturing, and various

us mixed gases.

HG808-D series on-line display dew point transmitter is also a good choice in fields such as meteorological analysis, power switches, metal smelting, petrochemical processes, natural gas processing, electronic manufacturing, textiles, pharmaceuticals, food, aerospace, etc. where dew point measurement is needed.

If the HG808-D series products fail to meet your measurement needs, please feel free to request other series of temperature and humidity measurement products from our customer service. Thank you again for your review!

1.2 Function Features

- Split type probes with strong anti pollution and oil resistance capabilities.
- Simultaneously supporting RS485 output and two analog outputs.
- Analog output with 15 high-resolution bits, digital output with optional resolution of 0.1 or 0.01.
- Supports single register and multi register reading.
- Equipped with anti condensation function, it can keep the sensor synchronized in high humidity environments
- Digital output can simultaneously read dew point, humidity, temperature, and PPM values
- Adopting the standard Modbus RTU protocol, it can easily achieve interconnection with PLC, DCS, and various configuration software.
- 10V~28V ultra wide voltage input, over current protection, power polarity protection, industrial grade ESD safety protection, and power supply anti reverse connection function.

2 Technical Parameter

2.1 Specifications

Range and Accuracy	
Dew point Range	-60 ~ +90°C (Adjustable within this range)
Temperature Range	-40 ~ +90°C
Dew point Accuracy	±2°C (± 3.6°F) Td (Refer to the dew point accuracy table for details)
Temperature Accuracy	±0.1°C (@23°C) (Refer to the temperature accuracy table for details)
Input and Output	
Power supply	DC 10V ~ 28V
Power consumption	<0.5W
Analog Outputs	Dew Point + Temperature
	4~20mA /0-5V /0-10V (One out of three)
RS485 Digital Output	Temperature, humidity, dew point, PPM (read simultaneously)
	resolution ratio: 0.01°C / 0.1°C (optional) 0.01%RH /0.1%RH (optional)
Baud rate	1200, 2400, 4800, 9600, 19200, 115200 can be set, The default is 9600 bps
Acquisition frequency	The fastest response is 1 second, other settings can be set according to PLC
Byte format	8 data bits, 1 stop bit, no check
Pressurization	16 bar
Working temperature (Transmitter body)	- 20°C ~ +60°C, 0%RH ~ 95%RH (Non condensation)
(Humidity and PPM value for reference only)	


2.2. Measurement values

Dew Point

Measurement range -60 ~ +90°C

Accuracy $\pm 2^{\circ}\text{C}$ ($\pm 3.6^{\circ}\text{F}$) Td

Accuracy within the dew point range

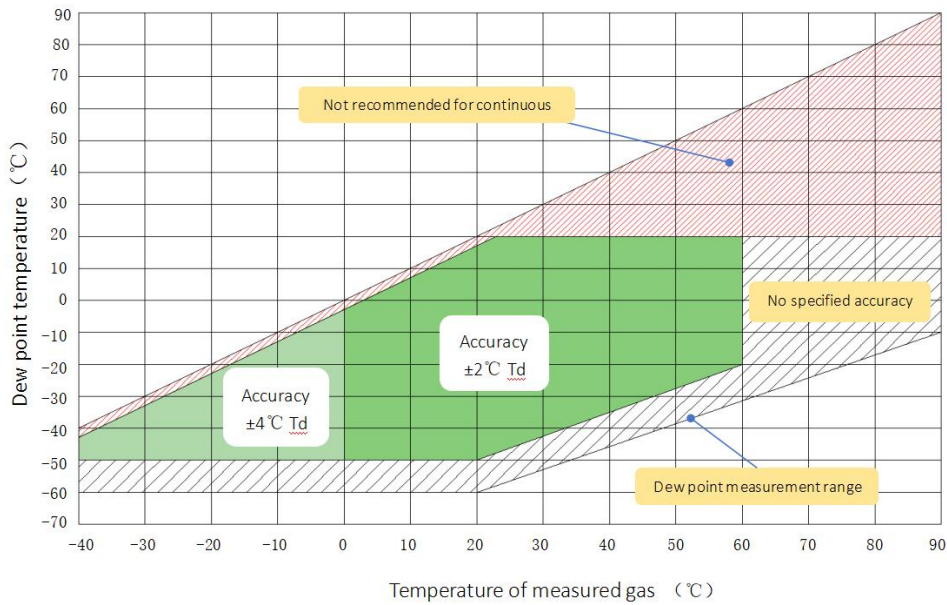

*Dew point measurement, it is recommended to measure the ambient temperature of -40 °C~+90 °C

Temperature


Measurement range

-40 ~ +90°C

Accuracy

±0.1°C (@23°C)


Accuracy of temperature

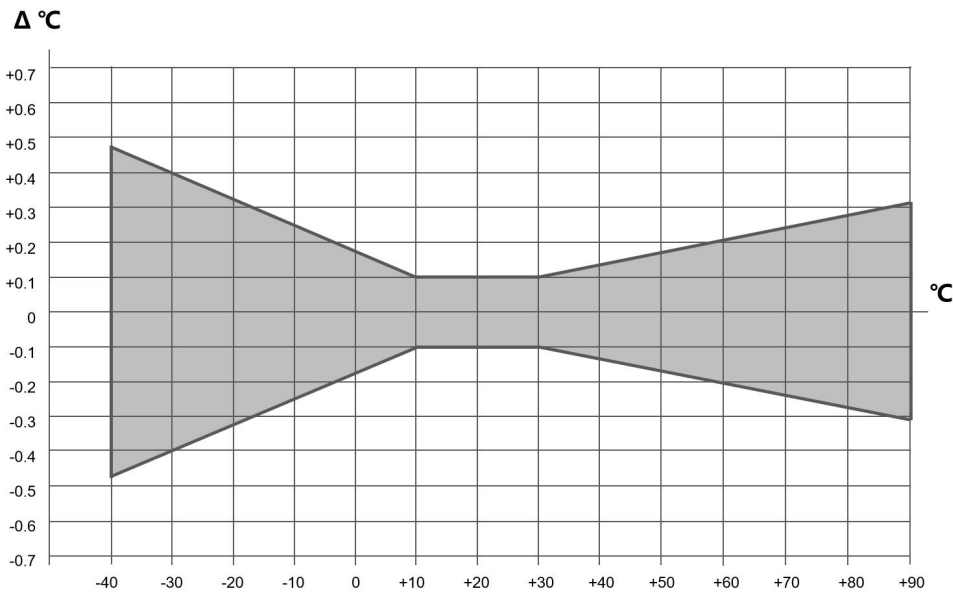

3 Product Selection

	HG808-D		
Probe Type	Split 0 (With a protective cover, the total length is 40mm)	Split 8 (With a protective cover, the total length is 103mm)	
	0	8	
Analog signal output(+485)	4~20mA	0-5V	0-10V
	4	5	1
Probe protection cover	Stainless steel sintering		Stainless steel grid
	A		B

HG808 - D Y -

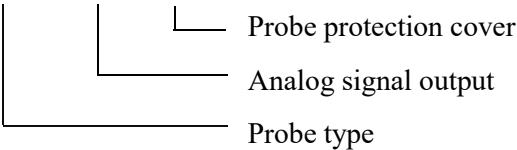



e.g:

HG808-D8Y4-B indicates a dew point transmitter for ultra-high temperature environments, equipped with split-type probe 8 (rod length: 103 mm), analog output 4–20 mA, and a type B stainless steel mesh probe cover.

4 Probe

4.1 Probe Type

The general probe structure of the HG808 transmitter is as follows in the table (can be customized as per customer requirements).

Type	Probe Description	Picture	Probe size
Split type probe 0	Compact and compact in structure, with optional hexagonal thread size, suitable for threaded fastening work environments or installation through box walls, easy to install.		
Split type probe 8	Commonly used for measuring temperature and humidity in high-temperature pipeline facilities such as large-sized pipelines and smoke pipes, or in the interior of wider box spaces, under pressurized or non-pressurized conditions.		

Probe installation:

The default thread is G1/2, and NPT1/2 or M20 thread is optional.

4.2 Probe Type

Type	Picture	Selection instructions
Stainless steel sintering		When applied in environments with high humidity, low dust, and easy condensation, grid style protective covers are more suitable.
Stainless steel grid		

5 Model List

Model	Signal output	Temp. range	Dew Point Range	Picture
HG808-D0Y4-A	4~20mA +RS485	-40 ~ +90°C	-60 ~ +90°C	
HG808-D0Y5-A	0-5V +RS485			
HG808-D0Y1-A	0-10V +RS485			
HG808-D8Y4-A	4~20mA +RS485			
HG808-D8Y5-A	0-5V +RS485			
HG808-D8Y1-A	0-10V +RS485			
HG808-D0Y4-B	4~20mA +RS485			
HG808-D0Y5-B	0-5V +RS485			
HG808-D0Y1-B	0-10V +RS485			
HG808-D8Y4-B	4~20mA +RS485			
HG808-D8Y5-B	0-5V +RS485			
HG808-D8Y1-B	0-10V +RS485			

Signal output description				
Model	Signal output	Output Value		
HG808-D0Y4-A HG808-D8Y4-A	4~20mA	Temperature and Dew point		
HG808-D0Y4-B HG808-D8Y4-B	RS485	Dew point	Temperature	Humidity (for reference only)
HG808-D0Y5-A HG808-D8Y5-A	0-5V	Temperature and Dew point		
HG808-D0Y5-B HG808-D8Y5-B	RS485	Dew point	Temperature	Humidity (for reference only)
HG808-D0Y1-A HG808-D8Y1-A	0-10V	Temperature and Dew point		
HG808-D0Y1-B HG808-D8Y1-B	RS485	Dew point	Temperature	Humidity (for reference only)

6 Accessory Selection

a. 12V1A power adapter

—— Easy for customers to quickly connect power when there is no PLC or other weak power supply.

Please contact the salesperson for the selection of pin specifications.



b. 485 to USB module

—— Compatible with Windows series, Mac OS, Linux and other systems, easy and fast to read.



c. Gas Sampling Kits

—By using gas sampling kits, you can indirectly measure the temperature, humidity and dew point data in the environment. The gas sampling kit can be used with different devices to solve the problem of measuring data under special working conditions, such as ultra-high temperature, ultra-high pressure, and harsh environments. The measurement inlet can be screwed directly into the probe or connected to a threaded adapter for sealing.



(1)



(2)



(3)



Contact Us

HENGKO Technology Co., Ltd.

Address:

Building 65, No. 43, Fukang Road, Pinghu Street, Longgang District,
Shenzhen, China

Contact number: 0086-0755-88823250

E-mail: ka@hengko.com

Website: www.hengkometer.com